

//DATASHEET

SALTO XS4 Escutcheon | networked electronic locking systems:

The SALTO XS4 One escutcheon is a revolutionary stand-alone electronic lock thanks largely to the level of technology packed inside that brings together the convenience of an offline point -- easy installation and no wires -- with virtually the same kind of power and performance of an online point.

XS4 One
Ex7

SALTO
inspired**access**



XS4
by S A L T O

NETWORKED ELECTRONIC ESCUTCHEONS

XS4 One

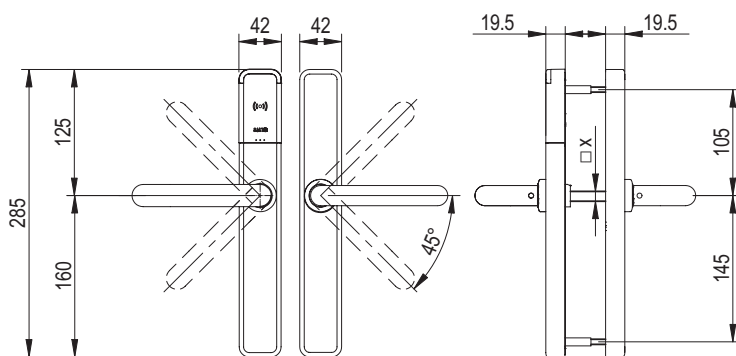
FOR EUROPEAN MORTISE LOCKS

The SALTO XS4 One is the evolution of the Original model with a built-in, totally new reader available in two colours. It includes the latest electronic components in order to warranty a future proof feature compatibility

The XS4 One version is specially designed to fit most Euro profile doors, even narrow profile framed doors. This version also works with the majority of European mortise locks and cylinders.

XS4 E40: NARROW BODY VERSION

EX70 XS4 One narrow body version Ex7



MAIN FEATURES:

- Fully integrated with the SALTO XS4 platform.
- Virtual network capable through SALTO Virtual Network technology.
- ID technologies available: DESFire, DESFire EV1, Mifare Classic, Mifare plus, Mifare Ultralight C and Bluetooth Smart.
- Reader available in 2 different colours: Black and white.
- 6 different escutcheon finishes available
- Door status detector to monitor intrusions or door left open status (wireless escutcheons only).
- Compatible with DIN mortise locks, European mortise locks and narrow style mortise lock.
- Compatible with European profile cylinders and Swiss profile cylinders.
- Mechanical override with audit trail facility available.
- High security protection via high resistance, hardened anti-drill plates to protect wiring and reader area. Additional protection provided by hardened axes and floating steel balls in the handle area.
- Electronic privacy function through thumb turn or button on the inside.
- IP53 (IP55 as an option only for the external escutcheon)
- Ei60, E90 Fire resistant.

MECHANICAL ASPECTS:

- Dimensions: 285mm x 42mm x 19.5mm
- Weight: 1.5kg
- Handle turning angle: 45°
- Door thickness compatible: 30mm to 115mm
- Distance from the handle to the cylinder: 47mm to 110mm
- Handle clutch mechanism.
- Inside always allows free egress (anti panic in combination with lock)
- Concealed fixing screws for greater security and improved aesthetics.
- Body and escutcheon made of steel
- Handle fixed by Steady Fix system (patented)
- Handles compatible: 16mm Ø, 18mm Ø
- High security through hardened high resistance anti-drill plates to protect wires and reader area and additional extreme protection through hardened axes and floating steel balls in the handle area.

MORTISE LOCK & CYLINDER COMPATIBILITY:

- DIN Locks
- European Locks
- Metal millwork
- European cylinders
- Swiss cylinders
- Some tubular latches

SQUARED SPINDLE COMPATIBILITY:

- 7mm, 8mm & 9mm.
- 7.6mm split, 8mm split, 9mm split.

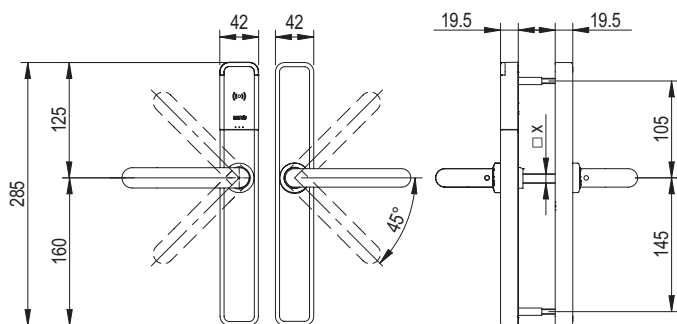
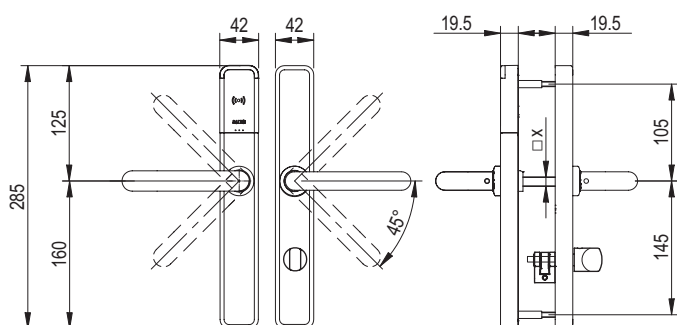
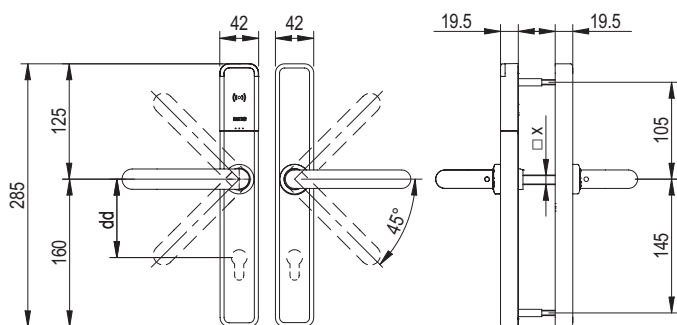
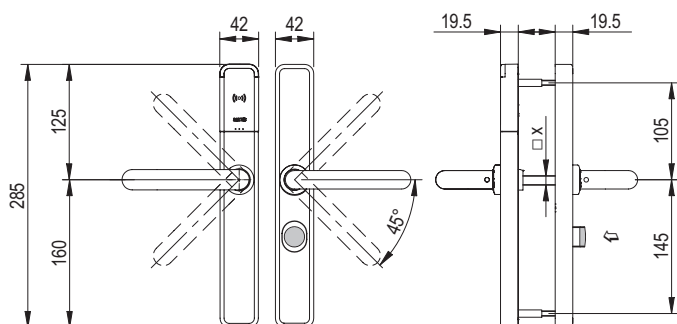
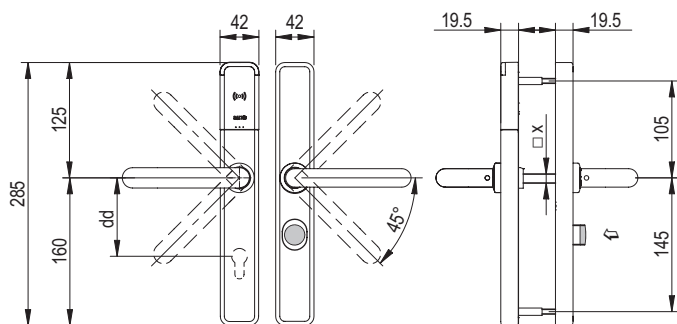
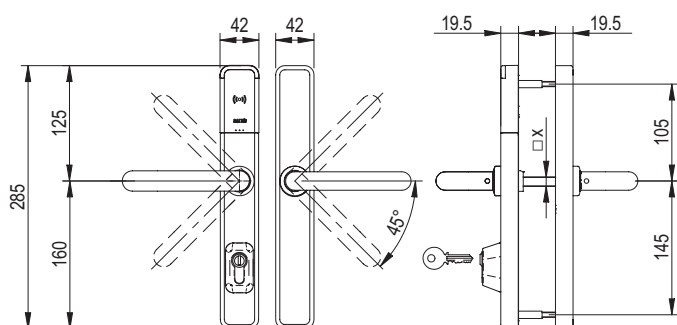
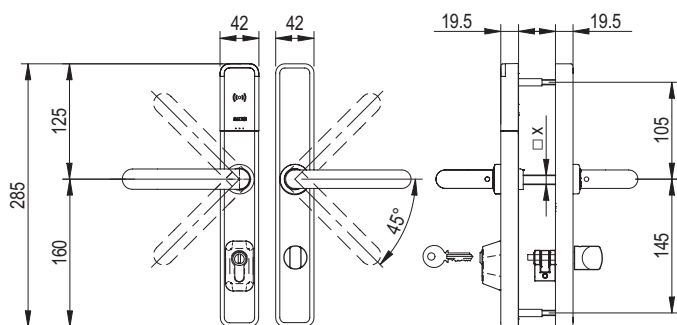
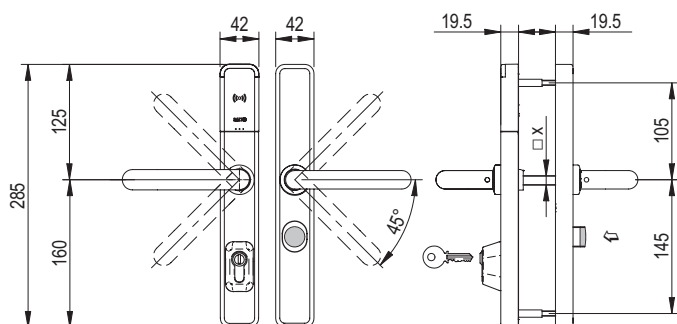
READER FINISHES

B Black  W White 

XS4 E40: MODELS

MODEL 50:

2 handles any type.

**MODEL 51:**2 handles any type.
Inside thumbturn.**MODEL 52/53/54:**2 handles any type.
Inside (models 52 / 53) / (models 54) Outside cylinder cut out.**MODEL 56:**2 handles any type.
Electronic "do not disturb" system (Not available in selfprogrammable).**MODEL 57:**2 handles any type.
• Outside cylinder cut out.
• Electronic "do not disturb" system (Not available in self-programmable).**MODEL P0:**2 handles any type.
• Built in mechanical override with audit.
(Ex4P0 reference: Euro profile cylinder 30-10).**MODEL P1:**• 2 handles any type.
• Inside thumbturn.
• Built in mechanical override with audit.
(Ex4P1 reference: Euro profile cylinder 30-10).**MODEL P6:**• 2 handles any type.
• Electronic "do not disturb" system
• Built in mechanical override with audit.
(Ex4P6 reference: Euro profile cylinder 30-10).

ELECTRONIC MAIN FEATURES AND BENEFITS:

- Simple offline installation is possible on any type of door, including those with narrow frames.
- Virtual network capable through SALTO Virtual Network technology.
- User on card audit trailing capability for audit trailing via the SALTO Virtual Network (SVN).
- Contactless versions compatible with ISO 14443A, ISO 14443B and ISO 15693 (Vicinity) and covering a wide range of mainstream RFID brands such as DESFire, DESFireEV1, Mifare Classic, Mifare plus and Mifare Ultralight C allowing multi-application with third party systems using one card.
- SALTO XS4 ONE is compatible with NFC (Near Field Communication) technology which allows NFC enabled cell phones to act as contactless data carriers to open and control SALTO access controlled doors (HCE technology).
- All communications between the carrier and the electronic lock are encrypted and secured.
- Low battery power indication monitored through the SALTO Virtual Network (SVN) as low battery status information is written onto the carriers and passed to the software. Readings can be taken at the lock and passed to the software via PPD connection.
- Emergency opening via portable programming device (PPD).
- Non volatile memory (memory is not deleted, even if power fails).
- New easy office mode.
- Mechanical override with audit trail facility in some models.
- Firmware upgrade through PPD.
- DDA (Disability Discrimination Act) compliant (depending on handle type).

*depending on the model

AVAILABLE LOCK MODES:

- **STANDARD:** Locked at all times.
- **OFFICE:** Free passage ability.
- **TIMED OFFICE:** Free passage with automatic locking.
- **AUTOMATIC OPENING:** 8 pairs of "hands free" timed lock and unlocks per day with holidays.
- **AUTOMATIC OPENING + OFFICE.**
- **TOGGLE:** Present card to lock, present card to unlock.
- **TIME TOGGLE:** Present card to lock, present card to unlock depending on schedules.
- **EXIT LEAVES OPEN:** The lock remains unlocked after the inside handle is used.

ACCESS CONTROL FEATURES:

	ROM	SVN (R&W)
Maximum number of users per door	1,000	4,000,000
Maximum number of doors per system	16,000	65,000
Maximum events on lock audit	2,200	2,200
Timezones	30	1024
Timeperiods	20	1,024
Calendars in system	42	256
User groups	unlimited	unlimited
Zones in System	unlimited	unlimited
Management software	Pro Access ROM	Pro Access SPACE ProAccess & HAMS (available SQL)

ID TECHNOLOGIES:

- **MIFARE:** Mifare Classic, Mifare plus, Ultralight C, DESfire, Vicinity.
- **NFC:** Near Field Communication technology allows NFC enabled cell phones to act as contactless data carriers to open and control SALTO access controlled doors (HCE technology).
- **BLUETOOTH:** Allows users to use their smartphone as their door key.*

MIFARE:

MIFARE DESFire

Mifare RFID contactless technology reads & writes information to contactless smart cards (RFID) compatible with standards, such as Mifare Classic, Mifare plus, DESFire, DESFire EV1 technologies or even Bluetooth Low Energy (BLE) technology. These technologies also allow for the updating of carriers via SALTO Virtual Network (SVN) technology.

- Fully integrated with the SALTO XS4 platform.
- 13.56MHz contactless RFID identification.
- ISO 14.443A, ISO 14.443B and ISO 15.693, Mifare, DESFire Compatible.
- Near Field Communication (NFC) compatible.
- Available key cards: 1Kbyte, 4Kbytes and 8 Kbytes depending on the technology.
- Available carriers: ISO 7810 Cards, fobs, bracelets, stickers, watches...
- Reusable key cards.
- SALTO Virtual Network (SVN) compatible*.
- High security encrypted Proximity cards.
- Multi-application with other systems using the same card with different sectors.
- Customized issuing card through the SALTO Authorization Media software (SAM).
- Waterproof cards which can be customized.
- Upgradable: ROM, R&W systems available using the same hardware.

RANGE OF RFID CREDENTIALS / KEYS AVAILABLE:



Contactless RFID Key
Cards



Contactless RFID
Fobs



Contactless RFID
Silicone Bracelet



Contactless RFID
Fobs Bracelet

MOBILE KEY SOLUTIONS:

mSVN SOLUTION:

With mSVN (Mobile SALTO Virtual Network) it's now possible to update cards remotely and without using a fixed update point. All an end-user needs is an NFC-enabled smartphone to update their DESFire EV1 credential using SALTO's JustIN mSVN App, thereby increasing the flexibility of an installation's security.



MAIN FEATURES:

- **XS4 COMPABILITY:** XS4 Original RFID escutcheon range. Extensive range of escutcheon styles and sizes including Scandinavian, ANSI models and Wireless models (RFID models only).
- **SMARTPHONE:** Android minimum version: 2.3.3
- **SYSTEM REQUIREMENTS:** SALTO ProAccess SPACE software.
- **SMART KEY COMPABILITY:** DESFire EV1 (AES – 3DES encryption) (SALTO SAM Card required)
- **BLACKLIST** dissemination that increases security without the need to wire or visit doors.



MOBILE USERS SOLUTION:

SALTO Bluetooth mobile via SALTO's JustIN Mobile app communicates securely via the Cloud and enables a user to receive their door key online, anytime and anywhere.



MAIN FEATURES:

- **XS4 COMPABILITY:** XS4 RFID escutcheon range.
- **SSL:** Secure Socket Layer.
- **AES 128 bits** encryption opening procedures.
- **SMARTPHONE COMPABILITY:** iOS and Android devices.
- **SYSTEM REQUIREMENTS:** SALTO ProAccess SPACE software.



FINISHES:



IMW
Satin stainless steel
and white reader



IMB
Satin stainless steel
and black reader



IMW
Bright stainless steel
and white reader



IMB
Bright stainless steel
and black reader



PPW
Bright Brass (PVD)
and white reader



PPB
Bright Brass (PVD)
and black reader



PMW
Satin Brass (PVD)
and white reader



PMB
Satin Brass (PVD)
and black reader



IAW
Antique Brass
and white reader



IAB
Antique Brass
and black reader



NEW
Black
and white reader



NEB
Black
and black reader



BCW
BioCote®
antimicrobial finish
and white reader



BCB
BioCote®
Antimicrobial finish
and black reader

TECHNICAL DATA:

CURRENT REQUIRED:

Models Ex7

- 3 alkaline LR03 AAA 1.5V. batteries optional FR03 lithium batteries
- Number of openings:
 - Contactless versions: Up to 40.000 depending on the RFID technology.

ENVIRONMENTAL CONDITIONS:

- -20° / 60°.

CERTIFICATIONS:

- Declaration of Conformity CE

Use of radio frequency spectrum

- ETSI EN 300 328 v1.9.1 (2015-02)
- ETSI EN 300 330-2 v1.6.1 (2015-03)

Electromagnetic Compatibility

- ETSI EN 301 489-3 v1.6.1 (2013-06)
- ETSI EN 301 489-17 v2.2.1 (2012-09)

Security requirements

- UNE-EN 60950-1: 2007 + CORR:2007 + AC:2012 + A11:2009 + A1:2011 + A12:2011

US and Canada:

- IC: 10088A-EB7
- FCC ID: UKCEB7

IP CERTIFICATIONS: Outdoor Protection Standard

- IP53
- IP55 model (interior IP53)

IP55 means:

SOLID PARTICLE RESISTANT	LIQUID INGRESS RESISTANT
Quantity of dust ingress is not sufficient to interfere normal operation.	Water projected by a nozzle (6.3 mm) against enclosure from any direction shall have no harmful effects.

SALTO ACCESS CONTROL PLATFORM FEATURES:

SALTO Systems unique new networked escutcheons and cylinders can be used for a huge range of access control applications. It's the first RFID system that can be upgraded at any time.

You choose the level of security control you need. From mid-range ROM system up to the high performance data on card technology SALTO Virtual Network (SVN) system that allows you to control all the doors in an entire building or group of buildings from a single PC. And with the brand new XS4 online battery operated wireless lock system, you can experience real-time access control solutions without the need for wiring.

- Completely integrated into the SALTO Systems platform.
- Enables users to have stand-alone electronic cylinders, stand-alone electronic locks, stand-alone electronic glass door locks, emergency exit devices, locker locks and IP based online readers, all in the same system with SALTO Virtual Network capabilities, making it possible to update user card access plans easily.
- Stand-alone escutcheons can be upgraded to wireless system.
- Battery-powered.
- Easy to install, use and maintain.

* Depending on the model

SALTO Systems reserves the right to modify technical specifications, designs and performance without notice. © SALTO SYSTEMS 2017